

FinishAdapt Ltd



CLETOP-S CASSETTE AND STICK

NEXT GENERATION CLEANING PERFORMANCE



The new CLETOP-S fiber optic cleaning cassette builds on the success of its predecessor to give world class cleaning performance at exceptionally competitive cost efficiency. Designed to suit operators, production engineers and buyer alike, the CLETOP-S offers the following advances: -I

- More Rugged, Ergonomic Design
- Slide open lock offers easier access to replacement reels
- Integrated replacement cartridge offers quicker, easier reel change
- Central push button operation offers ease of use for left handed and right handed operators
- Moulded plastic design makes it more cost effective than ever
- New tape availability offers improved cleaning performance
- Anti-static body and replacement cartridge

With no competitive product able to match its cleaning performance, ruggedness, and cost effectiveness, the CLETOP-S is the professional choice.



The CLETOP-S does away with cleaning fluids such as isopropyl alcohol which are not only toxic and flammable, but also leave a residue on the fibre ends after cleaning. The CLETOP-S cloth is extremely effective in the removal of oil, grease, dust and other contaminants from ferrule surfaces.



WHY SHOULD YOU CLEAN YOUR CONNECTORS

- **Dirt can cause pits and scratches on the ferrule end-face**
- **Dirty connectors may damage their mated counterparts**
- **Dirt can increase attenuation**
- **Dirt can increase digital bit error rates**
- **Dirt can reduce bandwidth**

WHY SHOULD YOU USE THE CLETOP-S

Wiping the surface with a conventional 15 micron fibre cloth leaves a trail of dirt behind.

The 2 micron fibre of the CLETOP-S cloth lifts all dirt through capillary action, trapping the dirt in the "micro pockets" inside the cloth.

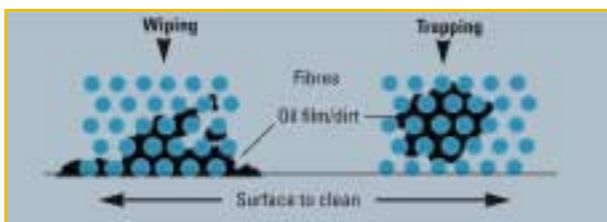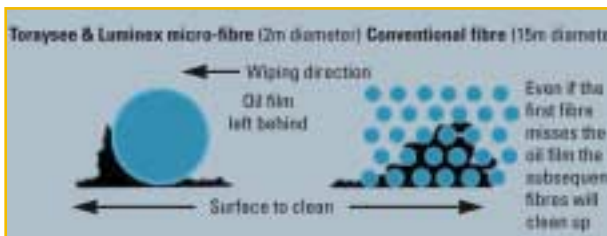

CLETOP-S reel-type

Life time over 400 wipes per replacement reel

Size 125 mm x 90 mm x 43 mm

CLETOP-S A-Connector Types SC, FC, ST, SMA, D4.

CLETOP-S B-Connector Types MU, MT, LC, Biconic, MPO (without pin), MT-RJ (without pin)

CLETOP stick-type

Size available 2.5 mm stick 1.25 mm stick

Length of stick 147 mm 101 mm

Connector/adapter types FC, ST, SC, SMA, D4, Diamond LC, MU

For Worldwide Sales and Distribution contact:
FinishAdapt Ltd, Unit 8, Hillmead Ind Est, Marshall Road,
Swindon, Wiltshire SN5 5FZ, UK
Tel: +44 (0) 1793 758720 - Fax: +44 (0) 1793 876059
Email: sales@finishadapt.com
http://www.finishadapt.com